



- Manufactured in France
- 1 temperature cabinet
- Large size
- Access Pack

Built-in and flush-fitted, 1 temperature cabinet, for ageing of wine

Technical specifications

Equipment
Standard shelves



Sliding shelf
ACMSIB
6 bottles



Sliding shelf
ACMSIW
6 bottles



Storage shelf
AXIHB
22 bottles



Storage shelf
AXIHW
22 bottles

Equipment
Optional shelves



Sliding wine service area
ACMSERVB
11 bottles



Sliding wine service area
ACMSERVW
11 bottles



Half shelf
ACMSI-DEMI
5 bottles

Capacity 89 bottles maximum*

Temperature

- Default setup temperature: 12°C/54°F
- Temperature setting range from 5°C to 20°C / 41- 68°F

Design

- 4 doors options: full glass door, stainless steel glass door, technical solid door, technical glass door (reversible integrated glass door with soft close and door stop)
- Lock (except technical door)
- LED screen with backlit capacitive keys
- Amber inner lighting: atmosphere lighting with the light strip and 2 LEDs
- 3 lighting options: permanent, open door, disabled
- Amber screen display

Accessories

- 3 sliding shelves with Mains du Sommelier (possible adjustment of the position of the MDS, on the front)
- 3 storage shelves (+grid)
- Light oak and black glossy front
- 6 removable bottles identifiers per sliding shelf
- 1 erasable felt-tip marker
- 1 microfiber cloth
- 1 key ring

Equipment

- Charcoal filter (with counter)
- Humidity cassette with clay ball
- Low-emissivity glass and argon gas between the 2 glasses (in glass door or full glass finish)
- 4 adjustable feet
- Condensate drip tray at the back

Regulation

- Electronic regulation
- Display of the real temperature inside the cabinet
- Possible humidity display
- Display standby mode, possible
- Visual and audible alarms: temperature fault, sensor fault and open door
- Visual alarms: humidity fault and carbon filter change
- Automatic defrost
- Frost protection thermostat (double protection)

Technologies

- Cold production:** Ventilated
- Cords:** CE/US/UK/JA/AU/CH/C6/CN
- Hot production:** Heating element
- Hot release:** Automatic/ threshold: adjustable
- Inner material:** Stucco aluminium
- Exterior coating material:** HDF (High Density Fiber) melamine-faced panels
- Insulation type:** PU Foam (59mm)

*Traditional Bordeaux format

General features

	Full Glass door	Stainless steel glass door	Technical glass door	Technical solid door
Empty wine cabinet net weight (kg)	91	92	87	80
Equipped cabinet net weight (kg)	105	106	101	94
Gross weight packaged (kg)	121	122	117	110
Dimensions H x W x D (mm)	1820-1890 x 557-594** x 597	1820-1890 x 557-594** x 597	1820-1890 x 557-594** x 597	1820-1890 x 557-594** x 597
Dimensions packaged (mm)	1980 x 645 x 630	1980 x 645 x 630	1980 x 645 x 630	1980 x 645 x 630
Specificities of the decor panel	Thickness: 20mm maximum / Weight: 12kg maximum			

**With fillers

Energy efficiency & Consumption

Cords	230V-50Hz (R600a)	230V-50Hz (R600a)	230V-50Hz (R600a)
Type of door	Full Glass	Stainless steel glass door/technical	Technical solid door
Energy efficiency class	G	G	G
Annual energy consumption AEC (Kwh/year)	176	176	136
Sound emission (dB(A))	38	38	38
Sound emission Class	C	C	C
Ambient operating temperature (°C/°F)	12-35/54-95	12-35/54-95	12-35/54-95
Useful volume (litres)	273		

Inspiration, in a few words...

Understated & Elegant

The heart of the home, the kitchen is no longer reserved just for cooking. A place to gather and spend time together, it is open to all the family and often friends too. The kitchen has become a place where good times are shared, things are created, ideas germinate and chemistry happens...





Manufactured in France **1 temperature cabinet** **Large size** **Premium Pack**

Built-in and flush-fitted, 1 temperature cabinet, for ageing of wine

Technical specifications

Capacity 89 bottles maximum*

Temperature · Default setup temperature: 12°C/54°F
· Temperature setting range from 5°C to 20°C / 41- 68°F

Design

- 4 doors options: full glass door, stainless steel glass door, technical solid door, technical glass door (reversible integrated glass door with soft close and door stop)
- Lock (except technical door)
- LED screen with backlit capacitive keys
- Amber inner lighting: atmosphere lighting with the light strip and 2 LEDs
- 3 lighting options: permanent, open door, disabled
- Amber screen display

Accessories

- 14 sliding shelves with Mains du Sommelier (possible adjustment of the position of the MDS, on the front) +grid
- Light oak and black glossy front
- 6 removable bottles identifiers per sliding shelf
- 1 erasable felt-tip marker
- 1 microfiber cloth
- 1 key ring

Equipment

- Charcoal filter (with counter)
- Humidity cassette with clay ball
- Low-emissivity glass and argon gas between the 2 glasses (in glass door or full glass finish)
- 4 adjustable feet
- Condensate drip tray at the back

Regulation

- Electronic regulation
- Display of the real temperature inside the cabinet
- Possible humidity display
- Display standby mode, possible
- Visual and audible alarms: temperature fault, sensor fault and open door
- Visual alarms: humidity fault and carbon filter change
- Automatic defrost
- Frost protection thermostat (double protection)

Technologies

- Cold production:** Ventilated
- Cords:** CE/US/UK/JA/AU/CH/C6/CN
- Hot production:** Heating element
- Hot release:** Automatic/ threshold: adjustable
- Inner material:** Stucco aluminium
- Exterior coating material:** HDF (High Density Fiber) melamine-faced panels
- Insulation type:** PU Foam (59mm)

Equipment
Standard shelf



Sliding shelf
ACMSIB
6 bottles



Sliding shelf
ACMSIW
6 bottles

Equipment
Optional shelves



Sliding wine service area
ACMSEVB
11 bottles



Sliding wine service area
ACMSEVW
11 bottles



Storage shelf
AXIHB
22 bottles



Storage shelf
AXIHW
22 bottles



Half shelf
ACMSI-DEMI
5 bottles

*Traditional Bordeaux format

General features

	Full Glass door	Stainless steel glass door	Technical glass door	Technical solid door
Empty wine cabinet net weight (kg)	91	92	87	80
Equipped cabinet net weight (kg)	120	121	116	109
Gross weight packaged (kg)	136	137	132	125
Dimensions H x W x D (mm)	1820-1890 x 557-594** x 597	1820-1890 x 557-594** x 597	1820-1890 x 557-594** x 597	1820-1890 x 557-594** x 597
Dimensions packaged (mm)	1980 x 645 x 630	1980 x 645 x 630	1980 x 645 x 630	1980 x 645 x 630
Specificities of the decor panel	Thickness: 20mm maximum / Weight: 12kg maximum			

**With fillers

Energy efficiency & Consumption


Cords	230V-50Hz (R600a)	230V-50Hz (R600a)	230V-50Hz (R600a)
Type of door	Full Glass	Stainless steel glass door/technical	Technical solid door
Energy efficiency class	G	G	G
Annual energy consumption AEC (Kwh/year)	176	176	136
Sound emission (dB(A))	38	38	38
Sound emission Class	C	C	C
Ambient operating temperature (°C/°F)	12-35/54-95	12-35/54-95	12-35/54-95
Useful volume (litres)	273		

Inspiration, in a few words...

Understated & Elegant

The heart of the home, the kitchen is no longer reserved just for cooking. A place to gather and spend time together, it is open to all the family and often friends too. The kitchen has become a place where good times are shared, things are created, ideas germinate and chemistry happens...



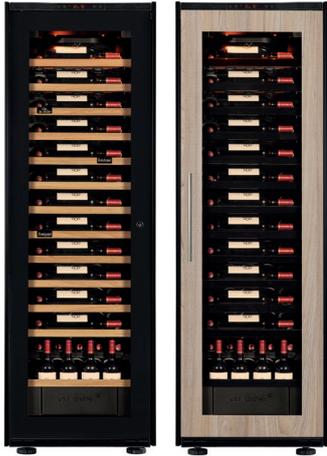

Manufactured in France **1 temperature cabinet** **Large size** **Service Pack**

Built-in and flush-fitted, 1 temperature cabinet, for ageing of wine

Technical specifications

Equipment
Standard shelves 



Sliding shelf
ACMSIB
6 bottles



Sliding shelf
ACMSIW
6 bottles



Sliding wine service area
ACMSERVB
11 bottles



Sliding wine service area
ACMSERWW
11 bottles



Half shelf
ACMSI-DEMI
5 bottles

Equipment
Optional shelves 



Storage shelf
AXIHB
22 bottles



Storage shelf
AXIHW
22 bottles

Capacity 88 bottles maximum*

Temperature · Default setup temperature: 12°C/54°F
· Temperature setting range from 5°C to 20°C / 41- 68°F

Design

- 4 doors options: full glass door, stainless steel glass door, technical solid door and technical glass door (reversible integrated glass door with soft close and door stop)
- Lock (except technical door)
- LED screen with backlit capacitive keys
- Amber inner lighting: atmosphere lighting with the light strip and 2 LEDs
- 3 lighting options: permanent, open door, disabled
- Amber screen display

Accessories

- 12 sliding shelves with Mains du Sommelier (possible adjustment of the position of the MDS, on the front)
- 1 half shelf and 1 sliding wine service area
- Light oak and black glossy front
- 6 removable bottles identifiers per sliding shelf
- 1 erasable felt-tip marker
- 1 microfiber cloth
- 1 key ring

Equipment

- Charcoal filter (with counter)
- Humidity cassette with clay ball
- Low-emissivity glass and argon gas between the 2 glasses (in glass door or full glass finish)
- 4 adjustable feet
- Condensate drip tray at the back

Regulation

- Electronic regulation
- Display of the real temperature inside the cabinet
- Possible humidity display
- Display standby mode, possible
- Visual and audible alarms: temperature fault, sensor fault and open door
- Visual alarms: humidity fault and carbon filter change
- Automatic defrost
- Frost protection thermostat (double protection)

Technologies

- Cold production:** Ventilated
- Cords:** CE/US/UK/JA/AU/CH/C6/CN
- Hot production:** Heating element
- Hot release:** Automatic/ threshold: adjustable
- Inner material:** Stucco aluminium
- Exterior coating material:** HDF (High Density Fiber) melamine-faced panels
- Insulation type:** PU Foam (59mm)

*Traditional Bordeaux format

General features

	Full Glass door	Stainless steel glass door	Technical glass door	Technical solid door
Empty wine cabinet net weight (kg)	91	92	87	80
Equipped cabinet net weight (kg)	122	123	118	111
Gross weight packaged (kg)	138	139	133	127
Dimensions H x W x D (mm)	1820-1890 x 557-594** x 597	1820-1890 x 557-594** x 597	820-1890 x 557-594** x 597	1820-1890 x 557-594** x 597
Dimensions packaged (mm)	1980 x 645 x 630	1980 x 645 x 630	1980 x 645 x 630	1980 x 645 x 630
Specificities of the decor panel	Thickness: 20mm maximum / Weight: 12kg maximum			

**With fillers

Energy efficiency & Consumption

Cords	230V-50Hz (R600a)	230V-50Hz (R600a)	230V-50Hz (R600a)
Type of door	Full Glass	Stainless steel glass door/technical	Technical solid door
Energy efficiency class	G	G	G
Annual energy consumption AEC (Kwh/year)	176	176	136
Sound emission (dB(A))	38	38	38
Sound emission Class	C	C	C
Ambient operating temperature (°C/°F)	12-35/54-95	12-35/54-95	12-35/54-95
Useful volume (litres)	273		

Inspiration, in a few words...

Understated & Elegant

The heart of the home, the kitchen is no longer reserved just for cooking. A place to gather and spend time together, it is open to all the family and often friends too. The kitchen has become a place where good times are shared, things are created, ideas germinate and chemistry happens...

